


# Roving

*for centrifugal casting*

Nittoob – Hobas type PG633

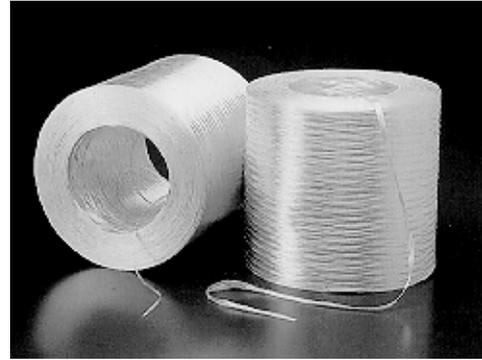

## Properties

- Easy chopping
- Low fuzz and good integrity
- Very good styrene solubility
- Good laydown and uniform dispersion
- Good transparency

Nittobo's PG633 is a collection of specific numbers of continuous E-glass strands gathered together without mechanical twist, into single bundle and wound onto a cylindrical package.

## Specifications

Refs	Tex	Filament diameter	Subtex	Stiffness (mm)	Loss of ignition (%)	Wet-through (seconds)	Wet-out (seconds)
NIRS240-PG633	2400	12 µm	60	140	1.07	40	60
NIRS360-PG633	3600	12 µm	187	140	1.07	40	60

## Packaging

Each individual cheese is contained within a transparent bag.

Ref	Weight per cheese (kg)	Cheese per pallet	Net weight per pallet	20' container	
				Pallets	Net weight
PG633	18	48	864	20	17 280

## Storage

Nittobo's PG633 should be stored dry in its original packaging.  
Storage temperature : max. 35 degrees C – Relative moisture : < 70 %

---

FRP Services reserves the right to change the information given herein without prior notice. We believe this information to be reliable, but do not guarantee its applicability to the user's process or assume liability for occurrence arising out of its use. The user, by accepting products described herein agrees to be responsible for thoroughly testing any application before committing to production.



**FRP SERVICES & COMPANY**  
1-15-9 Awaza, Nishi-ku, Osaka 550-0011, Japan  
TEL:+81-6-6535-1933 FAX:+81-6-6535-1675  
[www.frpservices.com](http://www.frpservices.com)